

ACE: Adapting to Changing Environments for Semantic Segmentation (Supplemental Material)

Detailed Architecture of the Decoder

Figure 1 presents the detailed architecture of the decoder used to synthesize new images. In particular, operating on re-normaralized feature maps, it gradually increases the resolution of feature maps while decreasing the number of channels.

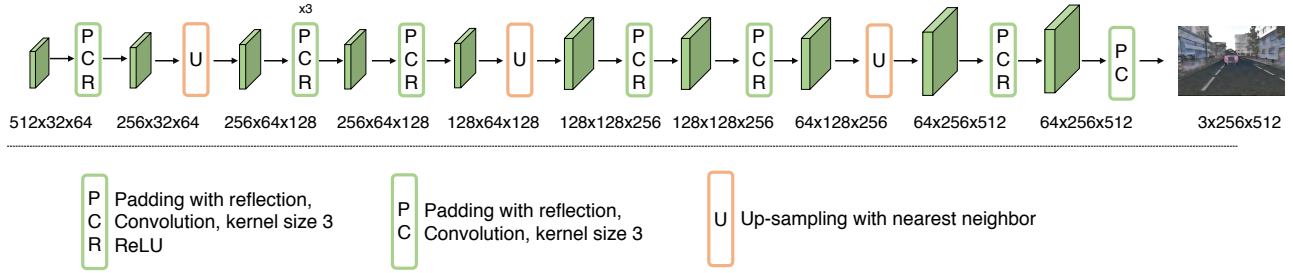


Figure 1: Architecture of the decoder.